

# Industrial Vacuums

**Twin-Motor  
Large Capacity  
Vacuum**



**Triple-Motor  
Large Capacity  
Vacuum**



**Twin-Motor  
"Walk Behind"  
Vacuum**




**Triple-Motor  
"Walk Behind"  
Vacuum**



CUSTOM VACUUMS

Specifications	DV-E2	DV-E3	DV-RV-2	DV-RV-3
<b>Motor(s):</b>	Twin	Triple	Twin	Triple
<b>Motor Power:</b>	2.7 HP (Total)	4.6 HP (Total)	2.7 HP (Total)	4.6 HP (Total)
<b>Input Power:</b>	15 Amps, 115 V, 50/60 Hz AC	13.5 Amps, 230 V, 50/60 Hz AC <i>Optional 27 Amps, 115 V, 50/60 Hz AC</i>	15 amps, 115 V, 50/60 Hz AC	13.5 amps, 230 V, 50/60 Hz AC <i>Optional 27 Amps, 115 V, 50/60 Hz AC</i>
<b>Power Supply Cord:</b>	30', 14-3	30', 14-3	30', 14-3	30', 14-3
<b>Air Requirements:</b>	•	•	•	•
<b>Static Water Lift:</b>	87"	90"	87"	90"
<b>Air Displacement:</b>	224 CFM	353 CFM	224 CFM	353 CFM
<b>Filtration:</b>	3 Microns Polyester Pocket Optional 1 Micron Anti-Static Pocket and 0.3 Microns HEPA	3 Microns Polyester Pocket Optional 1 Micron Anti-Static Pocket and 0.3 Microns HEPA	3 Microns Polyester Pocket Optional 1 Micron Anti-Static Pocket and 0.3 Microns HEPA	3 Microns Polyester Pocket Optional 1 Micron Anti-Static Pocket and 0.3 Microns HEPA
<b>Tank:</b>	27 Gallons Bonderized Steel	27 Gallons Bonderized Steel	14 Gallons Bonderized Steel	14 Gallons Bonderized Steel
<b>Dry Capacity:</b>	27 Gallons	27 Gallons	14 Gallons	14 Gallons
<b>Wet Capacity:</b>	26 Gallons	26 Gallons	•	•
<b>Noise Level:</b>	76 dBA	78 dBA	76 dBA	78 dBA
<b>Special Features:</b>	External Filter Shaker Roll-Out Tank •	External Filter Shaker Roll-Out Tank •	Front Mounted Floor Tool External Filter Shaker Roll-Out Tank •	Front Mounted Floor Tool External Filter Shaker Roll-Out Tank •
<b>Dimensions:</b>	20 1/2" Diameter Tank x 60" High	20 1/2" Diameter Tank x 60" High	20 1/2" Diameter Tank x 49" High	20 1/2" Diameter Tank x 49" High
<b>Weight:</b>	175 Lbs	180 Lbs	140 Lbs	145 Lbs
<b>Accessories/Prices:</b>	See Page 67	See Page 67	See Page 68	See Page 68

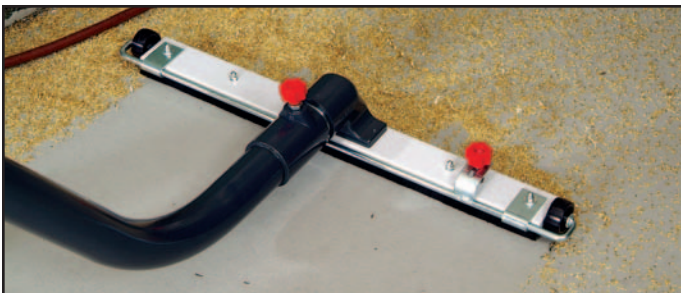

**DV-E2**



**DV-RV-2**

**For Sales Call: +1-203-359-4708  
Fax: +1-203-359-9601**